

AIR

600

67

50

57

434

(70-110)

POWER CORD 2000 LONG OUTSIDE

50


PRODUCT FEATURES

- New intelligent control circuit dedicated to saving power and water consumption.
- Micro computer controller controls ice making process to work at peak performance in any conditions.
- Inbuilt safety features freeze cycle back up timer, defrost back up, low voltage and high amp protector.
- New 7 segment operational display panel for ease of use.
- Unique closed cell water circuit for ultimate contamination protection.
- Durable stainless steel exterior.
- Easily accessible and cleanable air filters reduce costly callouts.
- Exceptionally hard crystal clear cubes that melt slowly.
- Auto rinse and flush cycle.
- 3 year parts and labour warranty on entire unit, 5 year (parts only) on compressor and air cooled condenser coil.





15 AIR AIR AIR) Bag (166) 仑 AIR (309) AIR AIR 704 (317) 674 50 19 655 9 WATER INLET G3/4

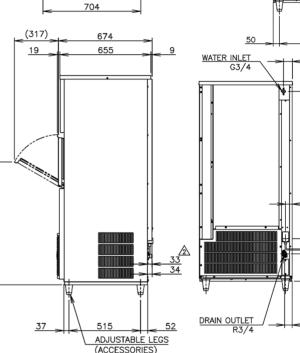

PRODUCT SPECIFICATION

Production Capacity	Approx. 220kg @ 10°C Air temp; 10°C Water
per 24hours	Approx. 205kg @ 21°C Air temp; 15°C Water
	Approx. 160kg @ 32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 110kg
Freeze Cycle Time	Approx. 20 Min
Ice Production Per cycle	Approx. 3.2kg/140pcs
Dimensions	704mm (W) x 665mm (D) x 1580mm (H)
	(Units include adjustable legs 70-110mm)
Cooling	Air
Weight Net/Gross (kg)	111 / 128
AC Supply Voltage	1 PHASE 220-240V 50Hz
Amperage	Running: 6.6A Rated: 6.6A Starting: 35A
Refrigerant Charge	R404A / 500g
Operating Conditions	Ambient Temp.: 1-40°C
	Water Supply Temp.: 5-35°C
	Water Supply Pressure: 0.07-0.8MPa (0.7-8bar)
	Voltage Range: Rated Voltage ±6%

Descriptions and specifications are subject to change at any time, without notice. Illustrations for demonstration purposes.



TECHNICAL DRAWING

(886)