





PRODUCT FEATURES

- New intelligent control circuit dedicated to saving power and water consumption.
- New 7 segment operational display panel for ease of use.
- Environmentally hard crystal clear cubes that melt slowly.
- Unique closed cell water circuit for ultimate contamination protection.
- Auto rinse and flush cycle.
- Micro computer controller controls ice making process to work at peak performance in any conditions.
- Easily accessible and cleanable air filters reduce costly callouts.
- Inbuilt safety features - freeze cycle back up timer, defrost back up, low voltage and high amp protector.
- Rated to 43°C ambient temperature (tropical conditions).
- Durable stainless steel exterior.
- 3 year parts and labour warranty on entire unit, 5 year (parts only) on compressor and air cooled condenser coil.

CUBE SIZE:



TECHNICAL DRAWING

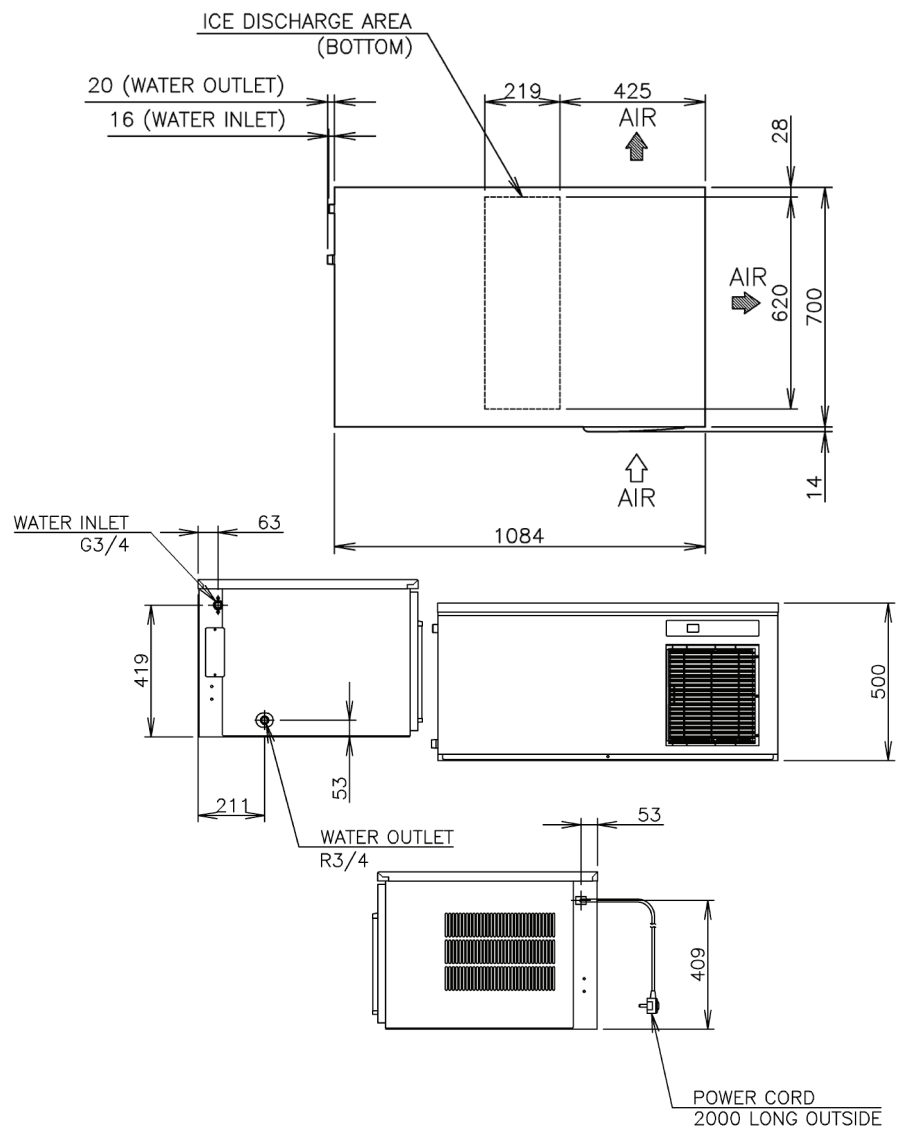

PRODUCT SPECIFICATION

Production Capacity per 24hours	Approx. 220kg @10°C Air temp; 10°C Water Approx. 205kg @21°C Air temp; 15°C Water Approx. 160kg @32°C Air temp; 21°C Water
Max Storage Capacity	Select Bin & Kit
Freeze Cycle Time	Approx. 19 Min
Ice Production Per cycle	Approx. 3.2kg/140pcs
Dimensions	1084mm (W) x 700mm (D) x 500mm (H) *Height of units based on the minimum 92mm leg
Cooling	Air
Weight Net/Gross (kg)	88 / 101
AC Supply Voltage	1 PHASE 220-240V 50Hz
Amperage	Running: 6.6A Rated: 6.6A Starting: 35A
Refrigerant Charge	R404A / 480g
Operating Conditions	Ambient Temp.: 1-40°C Water Supply Temp.: 5-35°C Water Supply Pressure: 0.07-0.8MPa (0.7-8bar) Voltage Range: Rated Voltage ±6%



Descriptions and specifications are subject to change at any time, without notice. Illustrations for demonstration purposes.

Copyright © 2019 Hoshizaki Lancer Pty Ltd. All right reserved. E&OE Date: May 2019